




INDUSTRIAS
AGAPITO 


CERTIFIED
EN 16899
PRODUCT

SIDNEY
AREA


PARKOUR

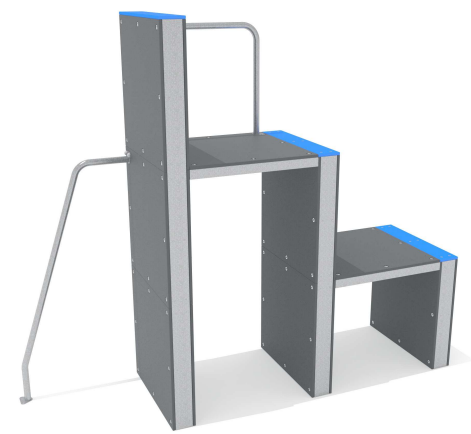

R7575

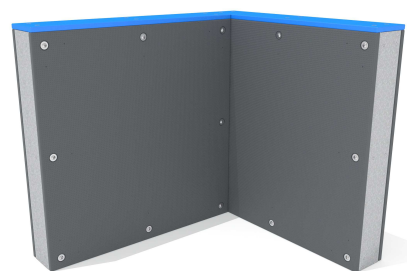


R7551




R7999




R7565




R7555




R7516

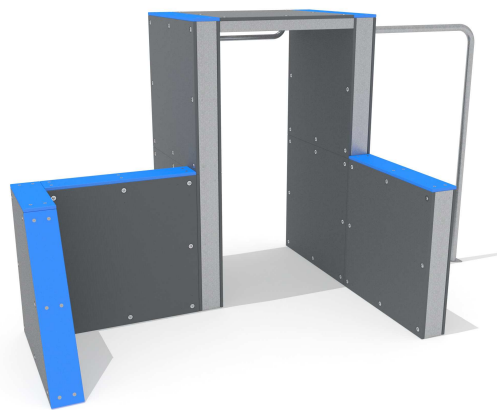

R7568



R7552



R7553




R7566



R7518



R7532

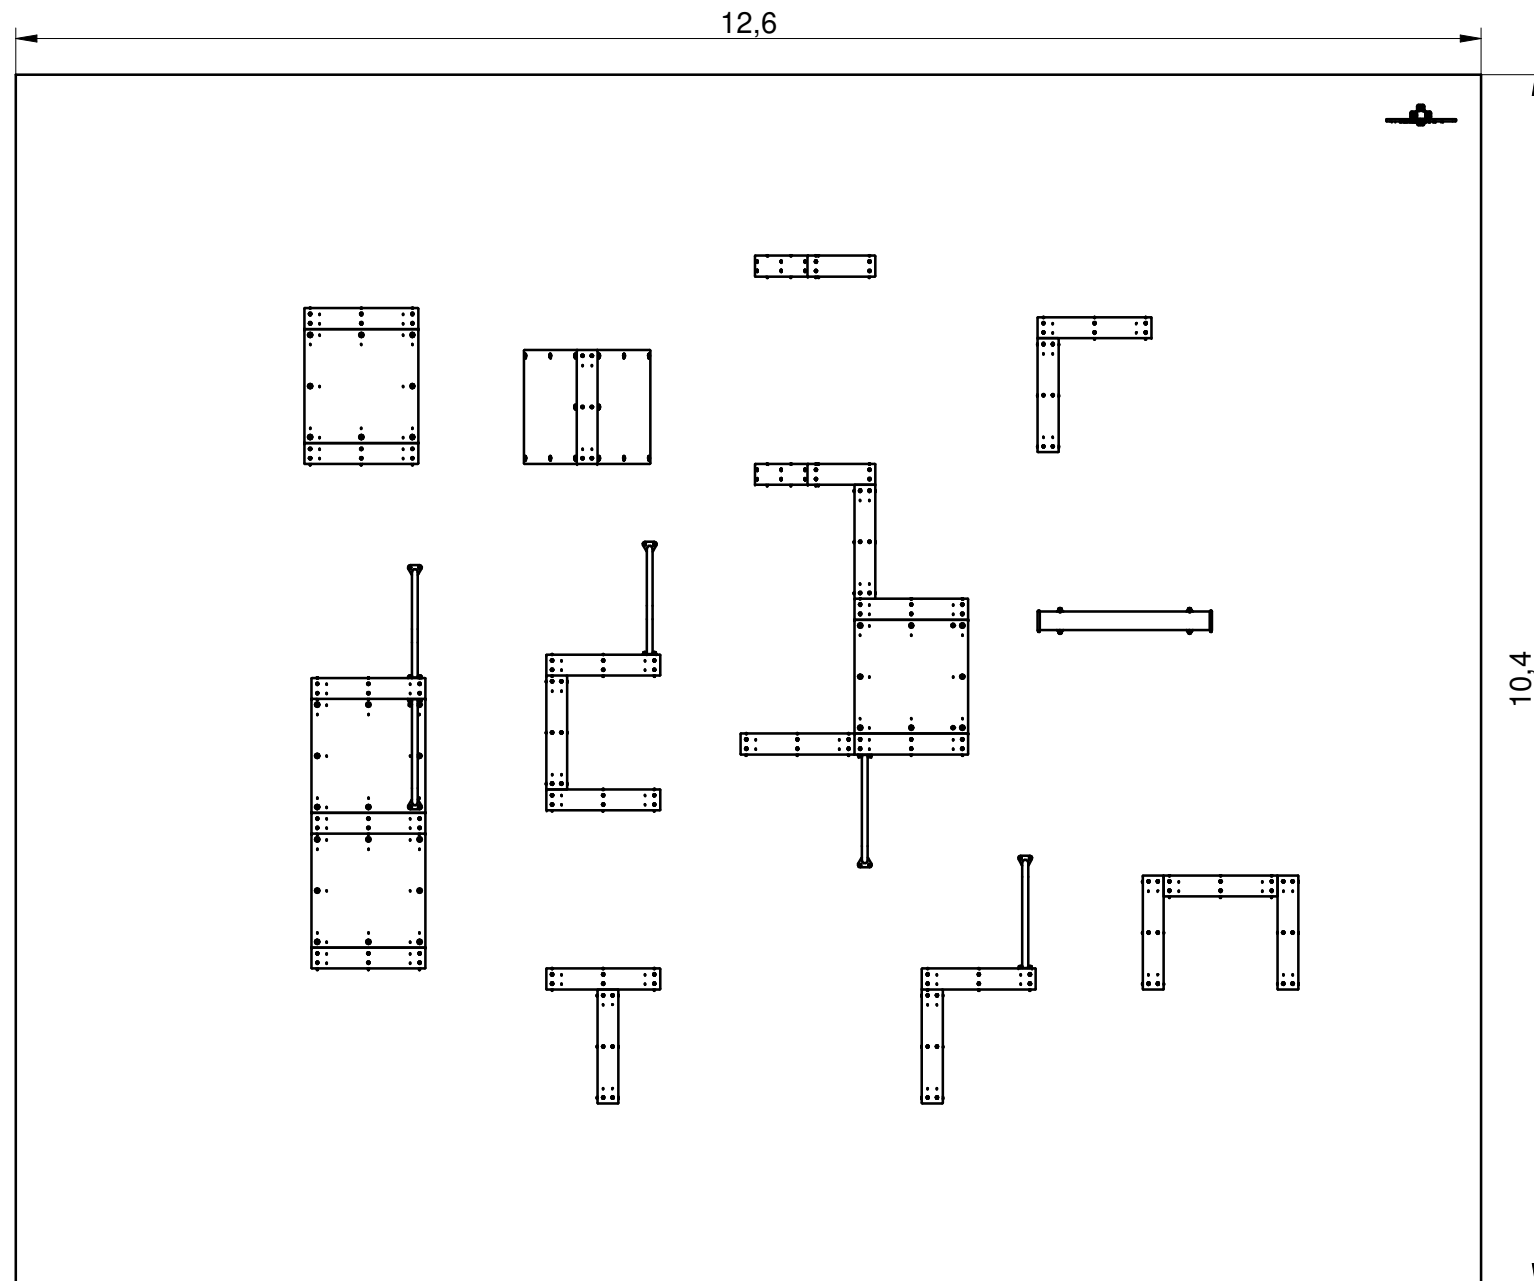

AREA RECOMENDADA:
RECOMMENDED SURFACE: 132 m²
SURFACE RECOMMANDÉE:

ALTURA MÁXIMA DE CÁIDA:
FREE HEIGHT OF FALL: 2,96 m
HAUTEUR DE CHUTE LIBRE:

SUPERFICIES AMORTIGUADORAS VÁLIDAS*:
VALID ABSORBING SURFACES*:
SURFACES ABSORPTION VALABLE*:

. ARENA / SAND / ARÉNE: 300 mm
. GRAVA / GRAVEL / GRAVEL: 300 mm
. EPDM: 25 - 80 mm

*VER REQUISITOS EN-16899
*SEE REQUIREMENTS EN-16899
*VOIR EXIGENCES EN-16899